

# TE1028V Multiple thermocouple circuit panel, vertical

## Application

<b>Female multi panel</b>	Thermocouple and RTD circuits
<b>Contacts</b>	Springloaded thermocouple contacts
<b>Materials</b>	Glass filled thermocouple body with original thermocouple material contacts
<b>Front</b>	Aluminium anodized for full corrosion protection

## Temperature rating

<b>Temperature limit</b>	Maximum 200°C
--------------------------	---------------

## Construction

<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Stainless steel bracket mounted with 2 screws
<b>Molded barriers</b>	Prevent short circuit
<b>Identified</b>	Scratchproof numbering

## Wire size


<b>Accepts wires</b>	From 0.2 mm to 2.0 mm
----------------------	-----------------------

<b>Colour code</b>	According thermocouple calibration
--------------------	------------------------------------



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

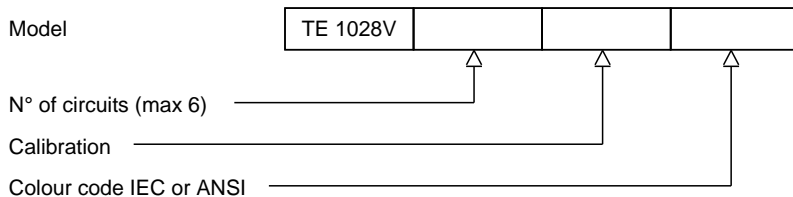

H9-2 Rev. 0 07/07