


KE 1092 Bare wire thermocouple

Probe type	
Hot junction	Exposed
Insulator material	Ceramic type 610
Insulators	Ceramic beads
Alternative	Ceramic rod
Thermocouple	
Calibration	K, N, B, R or S
For duplex	KK, NN, BB, RR or SS
Accuracy	According IEC 60584
Wire size	
Diameter	0.35 - 0.5 - 0.8 - 1.5 - 2.0 - 2.6 - 3.0 - 3.2mm
Element length	Customer to specify
Construction	
Thermocouple	Bare wires
Diameter	Customer to specify
Oval shape	5.0x3.0, 7.0x5.0 or 12x8.0mm
Round shape	3.0 - 8.0mm
Options	
Insulator material	Ceramic type 710

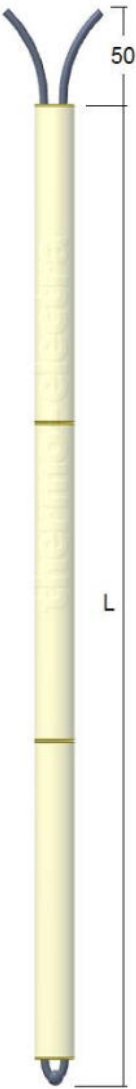

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	<table><tr><td>KE 1092</td><td></td><td></td><td></td><td></td></tr></table>				KE 1092				
KE 1092									
Calibration	<table><tr><td></td><td></td><td></td><td></td><td></td></tr></table>								
Length "L" in mm	<table><tr><td></td><td></td><td></td><td></td><td></td></tr></table>								
Wire size	<table><tr><td></td><td></td><td></td><td></td><td></td></tr></table>								
Insulator size in mm	<table><tr><td></td><td></td><td></td><td></td><td></td></tr></table>								