


MI 2039 Springloaded resistance thermometer

Sheath	
Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	Customer to specify
Diameter	6.0mm standard, other diameters possible
Process connection	M20x1.5, 1/2"BSP (G1/2"), 1/2"NPT or other threads possible
Style / Connection	
Mechanical	For M20x1.5, 1/2"BSP (G1/2"), 1/2"NPT or other threads possible
Electrical	Insulated PTFE wires 180°C, 150 mm
Construction	Springloaded insertion, length 25 mm
Sensor	
Detector	Single or Duplex Pt100
Accuracy	According IEC 60751 Cl. B, A or AA
Style / Connection	3-wire system standard, 4-wire system optional
Range	-20 / +400°C standard, -220 / +600°C optional
Insulation material	Mineral insulated (MgO)
Testing	Tested 500 Vdc @ 20°C
Insulation resistance	Minimum 100 Mohm

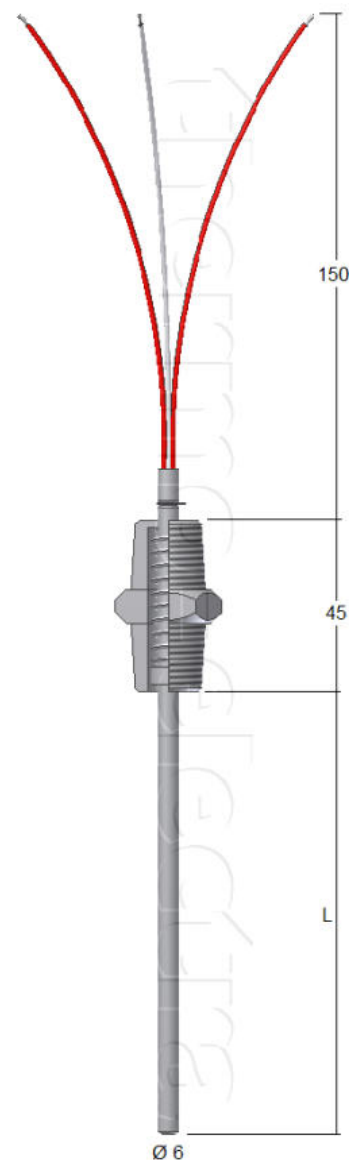

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	MI 2039				
Sensor (S or D)					
Connection 3- or 4-wire					
Class B, A or AA					
Length "L" in mm					

H2-1 Rev.0 7/07