

FT 3060 Flanged thermowell – tapered

Thermowell

Design Drilled bar stock with welded process flange
Materials SS 316 - (Wst 1.4401) standard, other materials possible

Stem / Shaft

Diameter Tapered from 25mm to 20mm at the tip standard, other diameters possible
Bore 6.5 mm standard, other bores possible
Bottom thickness 5.0mm standard, other thicknesses possible
Female connection 1/2" NPT, 3/4" NPT, 1/2" BSP, M20x1.5 or other threads possible

Flange


Flange facing Flat Face, Raised Face, Ring Type Joint, Tongue Face or Groove Face
Standards ASME B16.5, DIN 2526/2527, or EN 1092-1
Flange weld Full Penetration, partial penetration or screwed flange seal welded

Dimensions

Insertion length To specify
Lagging To specify, standard 60mm
Flange size To specify
Flange rating To specify
Flange facing To specify

Options

Other materials and dimensions
 Fully machined from bar, no weldings
 Protective coating, PTFE, Halar, Stellite etc.
 Tagging, Wake frequency calculation

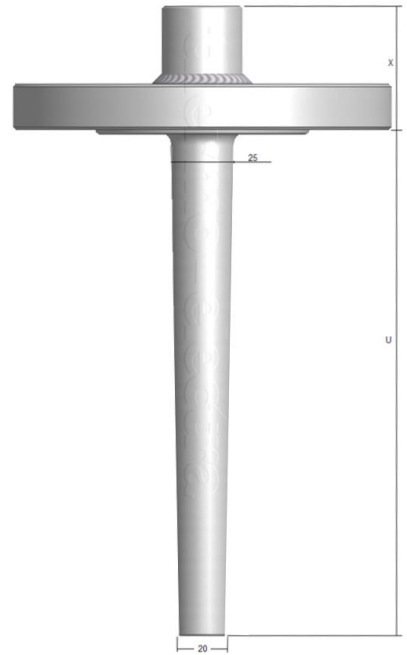

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

