

SW 3040 Threaded thermowell – stepped

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Male threaded
Thread size	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
Material	SS 316 - (Wst1.4401)

Stem / Shaft

Wetted part	Stepped, see table
Insertion length	To specify
Bore Size	6.6 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm

Connection length

Standard length	50mm
Extended Hexagon	To specify


Female connection

Threaded	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
-----------------	---

Options

- Other materials and dimensions
- Plug and chain for test well
- Protective coating, PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

Process connection	D1	D2	HEX
1/2" NPT	17 mm	13 mm	27 mm
3/4" NPT	22 mm	13 mm	32 mm
1" NPT	25 mm	13 mm	36 mm

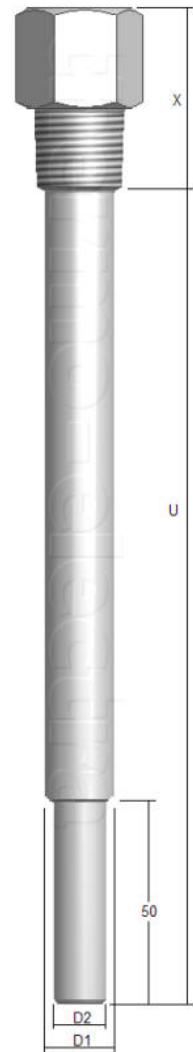

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

