DD 3050 Weld-in thermowell according to DIN43772 Form 4

Thermowell	
Design	Drilled bar stock (solid machined)
Process connection	Weld-in
Material	
Stock items	Wst. 1.4571, 1.4404, 1.7335, 1.5415, 1.0460
Other materials	To specify
Stem / Shrank	
Wetted part	Tapered
Dimensions	
Length L1, L2, L3.	See table
Standard	According DIN 43772 Form 4
Bore Size	7mm
Tolerance	H7
Options	
	Other dimensions or bore size
	Plug and chain for test wells
	Tagging
	Wake frequency calculation

Type	L1	L2	L3	D1	D2	Connect.
D1	140	50	65	24	12,5	M18x1.5
D2	200	50	125	24	12,5	M18x1.5
D3	200	50	125	30	16	M18x1.5
D4	200	110	65	24	12,5	M18x1.5
D5	260	110	125	24	12.5	M18x1.5
D6	225	105	125	30	16	M18x1.5

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

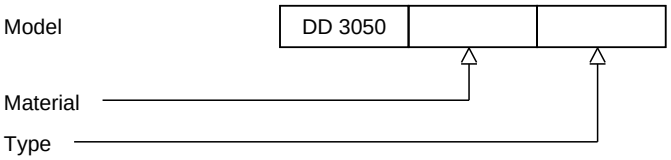

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com