

ME 1073 Tube skin thermocouple with armoured PTFE cable

Sheath

Construction	Weld on pad
Material	SS 316 - (Wst 1.4401)
Insulation	Mineral insulated (MgO)
Diameter "D"	6.0 mm standard
Length "L"	Customer to specify

Lead wire

Transition	Stainless steel sealpot with epoxy resin seal, moisture resistant
Ingress protection	IP65 / IEC529
Wire	FEP insulated flexible thermocouple wire with glassfiber braiding and stainless steel overall braid. Maximum 220°C
Lead wire length "K"	Customer to specify

Welding pad


Material	Same as sheath
Dimensions	25 x 25 x 3 mm

Thermocouple

Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 584-1 / DIN 43710
Hot junction	Insulated
Insulation	Mineral insulated (MgO)
Insulation test	Tested with 500 Vdc @ 20 °C
Insulation resistance	Minimum 100 M ohm

Options

Hot junction	Grounded hot junction
Material	Other sheath/pad material such as Inconel or Hasteloy

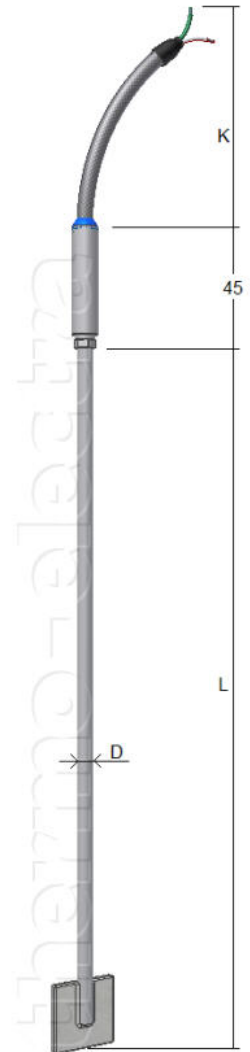

Thermokoppel kleurcodes

Thermocouple Extension Type	ANSI	IEC
JX + Iron - Constantan ®		
KX + Chromel ® - Alumel ®		
TX + Copper - Constantan ®		
EX + Chromel ® - Constantan ®		
NX + Nicrosil ® - Nisil ®		
SX + Copper - Alloy 11		
BX + Copper-S - Copper-E		

Toleranties volgens IEC 584-2

Type	Class	Temperature range	Fixed value °C	Tolerance to temp. t (°C)
T	1	- 40°C to + 350°C	± 0,5	± 0,004 · t
	2	- 40°C to + 350°C	± 1	± 0,0075 · t
	3	- 200°C to + 40°C	± 1	± 0,015 · t
E	1	- 40°C to + 800°C	± 1,5	± 0,004 · t
	2	- 40°C to + 900°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
J	1	- 40°C to + 750°C	± 1,5	± 0,004 · t
	2	- 40°C to + 750°C	± 2,5	± 0,0075 · t
	3	-	-	-
K and N	1	- 40°C to + 1000°C	± 1,5	± 0,004 · t
	2	- 40°C to + 1200°C	± 2,5	± 0,0075 · t
	3	- 200°C to + 40°C	± 2,5	± 0,015 · t
R and S	1	0°C to + 1600°C	± 1,0	± [1+0,003·(t-1100)]°C
	2	0°C to + 1600°C	± 1,5	± 0,0025·t
	3	-	-	-
B	1	-	-	-
	2	+ 600°C to + 1700°C	± 1,5	± 0,0025·t
	3	+ 600°C to + 1700°C	± 4	± 0,005·t

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

