

# TF 5800 Adjustable bayonet thermocouple

## Construction

<b>Insertion length</b>	Springloaded
<b>Diameter</b>	6.0mm standard, other diameters possible
<b>Bayonet</b>	Diameter 12.2 mm, one slot
<b>Spring</b>	Length 200 mm

## Extension cable

	FEP/PFA insulated thermocouple cable with steel wire braiding
<b>Length</b>	3000mm standard, other lengths possible

## Thermocouple

<b>Calibration</b>	K, J or L
<b>For duplex</b>	KK, JJ or LL
<b>Accuracy</b>	According IEC 60584 / DIN 43710
<b>Temperature</b>	400°C maximum
<b>Hot junction</b>	Grounded


## Bayonet adaptor

<b>Model C6</b>	Process connection M12 x 1.75 Please order seperately
-----------------	--



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

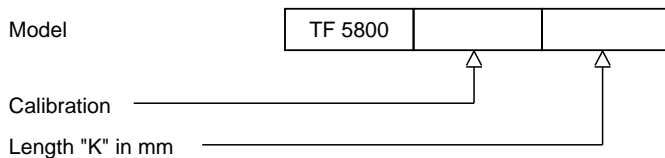

H5-1 Rev. 07/07