

# TF 5810 Adjustable bayonet thermocouple

## Construction

Insertion length	Springloaded
Diameter	8.0mm standard, other diameters possible
Bayonet	Diameter 12.2 mm, one slot
Spring	Length 200 mm

## Extension cable

	PTFE insulated thermocouple cable with steel wire braiding
Length	3000mm standard, other lengths possible

## Thermocouple

Calibration	K, J or L
For duplex	KK, JJ or LL
Accuracy	According IEC 60584 / DIN 43710
Temperature	400 °C maximum
Hot junction	Grounded


## Bayonet adaptor

Model B1	Process connection 1/4"BSP (G1/4")
Model B2	Process connection 3/8"BSP (G3/8")
Model B3	Process connection M14x1.5
	Please order separately



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

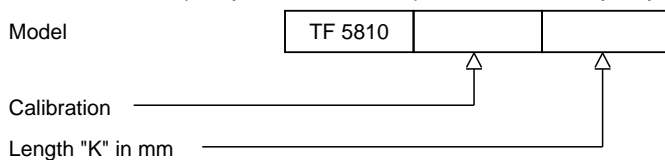

H5-1 Rev. 07/07