


# TF 5850 Thermocouple for high pressure plastic moulding

## Insertion length

<b>Tip</b>	Fixed length
<b>Barrel</b>	Drilled SS 316 - ( Wst 1.4401 ) standard, other materials possible
<b>Construction</b>	Tip welded to barrel
<b>Length</b>	Customer to specify ( standard 75 mm )
<b>Process connection</b>	1/2"-20UNF standard, other threads possible
<b>Drawing</b>	Detail drawing available


## Thermocouple

<b>Calibration</b>	J, K or L
<b>For duplex</b>	JJ, KK or LL
<b>Accuracy</b>	According IEC 60584
<b>Hot junction</b>	Grounded
<b>Style / Connection</b>	2 pole thermocouple plug model TE 1060 - J

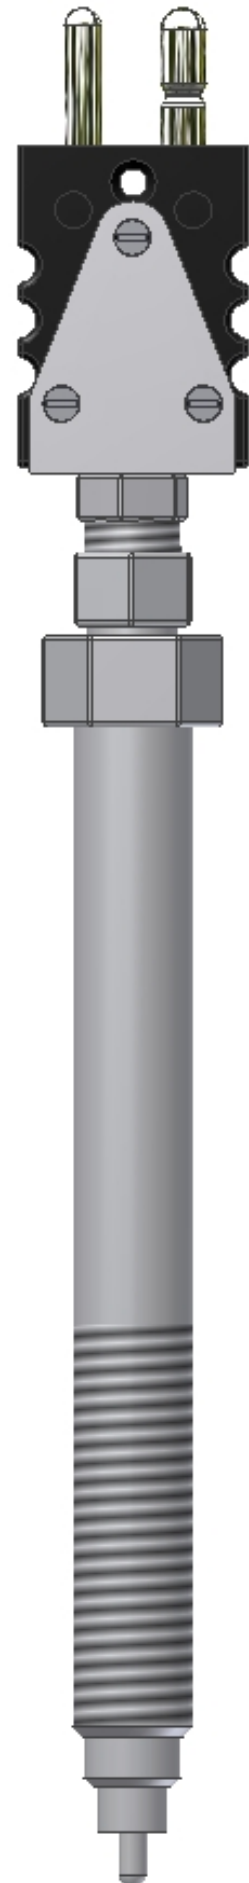

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

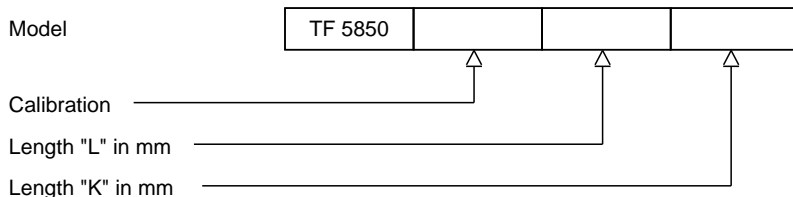

H5-1 Rev. 07/07