


TF 5860 Plastic melt thermocouple adjustable length

Insertion length	
Tip	Adjustable insertion length
Barrel	Drilled SS 316 - (Wst 1.4401) standard, other materials possible
Construction	Element replaceable. optional welded or vacuum brazed
Length	75mm standard, other lengths possible
Process connection	1/2"-20UNF standard, other threads possible
Drawing	Detail drawing available
Thermocouple	
Calibration	J, K or L
For duplex	JJ, KK or LL
Accuracy	According IEC 60584
Hot junction	Grounded
Extension cable	
	Teflon insulated flexible extension cable with stainless steel flexible hose, up to 240°C
Length	Customer to specify
Style / Connection	2 pole thermocouple plug model TE 1060

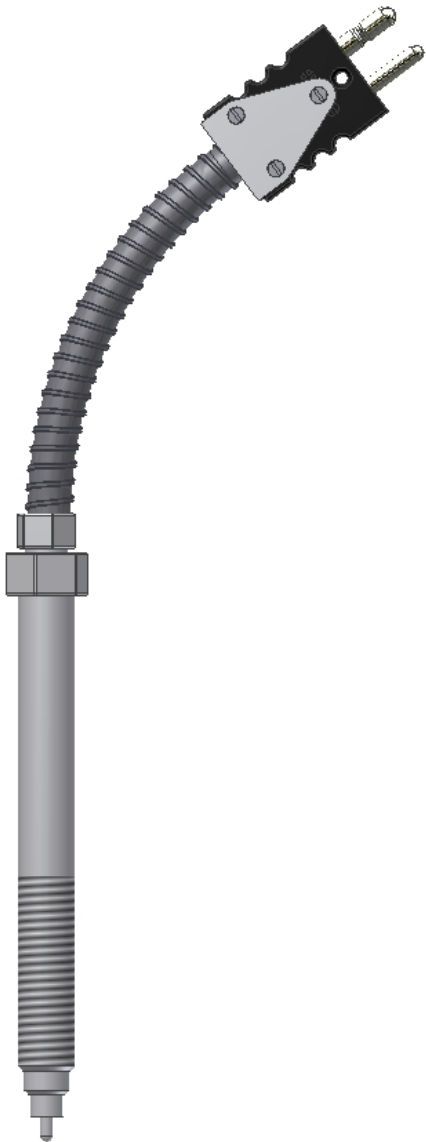

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	TF 5860				
Calibration					
Length "L" in mm					
Length "X" in mm					
Length "K" in mm					

H5-1 Rev. 07/07