

# WF 5810 Adjustable bayonet resistance thermometer

## Construction

<b>Insertion length</b>	Springloaded
<b>Diameter</b>	8 mm
<b>Bayonet</b>	Diameter 12.2 mm, one slot
<b>Spring</b>	Length 200 mm

## Cable

Teflon insulated flexible cable with stainless steel braiding, 240°C

**Cable length "K"** Customer to specify, 3000mm standard

## Tip length "L"

Customer to specify 16 or 40 mm

## Temperature

400°C maximum

## Sensor

Single Pt 100

**Accuracy** According IEC 751 class B

**Style / Connection** 3 wire system

## Bayonet adaptor

Please order separately

**Model B1** Process connection 1/4" BSP


**Model B2** Process connection 3/8" BSP

**Model B3** Process connection M14 x 1.5



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

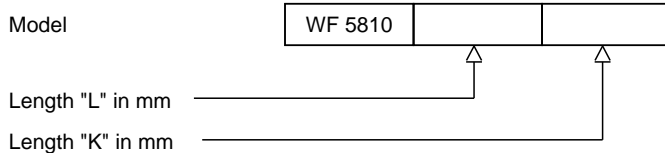

H5-1 Rev. 07/07