

WF 5820 Adjustable bayonet resistance thermometer

Construction

Insertion length	Springloaded
Diameter	8 mm
Bayonet	Diameter 15 mm, two slots
Spring	Length 200 mm

Cable

PTFE insulated flexible cable with stainless steel braiding, 240°C

Cable length	Customer to specify (3000 mm standard)
---------------------	--

Tip length

Customer to specify 16 or 40 mm

Temperature

400°C maximum

Sensor

Single Pt 100

Accuracy	According IEC 751 class B
-----------------	---------------------------

Style / Connection	3 wire system
---------------------------	---------------

Bayonet adaptor

Please order separately

Model A1	Process connection 1/4"BSP
-----------------	----------------------------


Model A2	Process connection 3/8"BSP
-----------------	----------------------------

Model A3	Process connection M14 x 1.5
-----------------	------------------------------



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

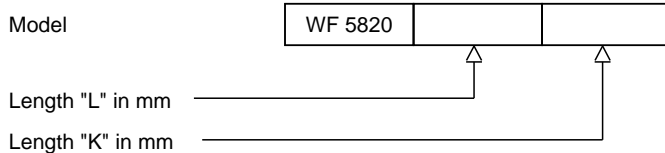

H5-1 Rev. 07/07