


# T05 PFA insulated twisted thermocouple wire -75°C to +250°C

<b>Insulation material</b>	Each wire high quality extruded PFA
<b>Shape</b>	Twisted pair
<b>Moisture resistance</b>	Excellent
<b>Temperature limits</b>	-75/+250°C
<b>Conductors</b>	
<b>Conductor sizes</b>	Solid 0.03, 0.07, 0.2, 0.5 or 0.8mm Stranded 0.124 or 0.22mm <sup>2</sup>
<b>Calibration</b>	
<b>Thermocouple type</b>	K, T, J, E, N, U or L
<b>Accuracy</b>	According IEC 60584 / ANSI MC96.1
<b>Colour code</b>	According thermocouple calibration IEC, ANSI, BS etc.



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

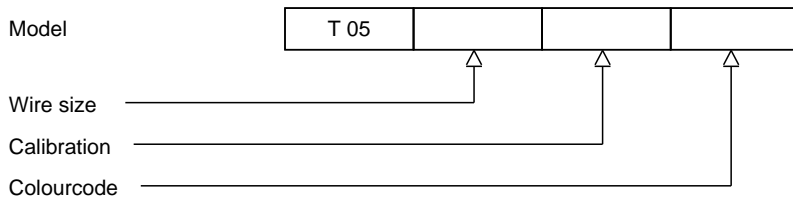

H8-1 Rev. 07/07