


E30 Twisted PVC thermocouple extension cable -30°C to 85°C

Specifications	
Insulation material	High quality extruded PVC
Temperature limits	-30 / +85 °C
Moisture resistance	Good
Conductors	
Conductor type	Stranded, twisted pair
Conductor size	0.5mm² (16x0.2mm), 1.5mm² (48x0.2mm)
Outer diameter	0.5mm² each wire 1.6mm, 1.5mm², each wire 2.8mm
Calibration	
Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	Conforms to IEC 60584 and ANSI MC 96.1
Colourcode	According thermocouple calibration IEC, ANSI, BS etc.
Applications	
Cabinet and instrumentation circuit wiring	
Industrial and general purpose applications	
Dimensions	
Wire size 0.5mm²	+/- 2.0x1.6mm
Wire size 1.5mm²	+/- 2.0x2.8mm



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

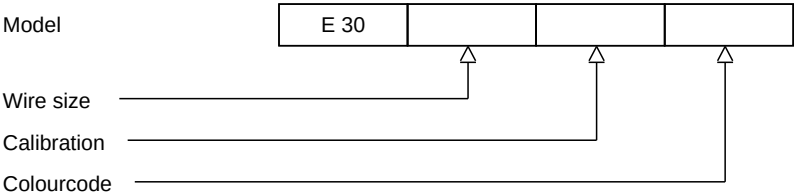

H8-1 Rev. 07/07