


DWK 6030 Vibration proof thermocouple

Design	
Applications	Designed for use on combustion engines
Protection tube	
Construction	Closed-end tube
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	150mm standard, other lengths possible
Diameter	12x9.0mm reduced tip standard, other diameters possible
Process connection	1/2"NPT, 3/4"NPT, 1/2"BSP, M20x1.5 or other threads possible
Temperature	800°C maximum
Extension cable	
Length	Heat and oil resistant armoured extension cable up to +250°C
Length	1000mm standard, other lengths possible
Sensor	
Thermocouple	K, J or L
Accuracy	According IEC 60584-1
Hot junction	Insulated
Testing	Tested 500 Volt @ 20 °C
Insulation	Minimum 100 M ohm
Design	Vibrationproof

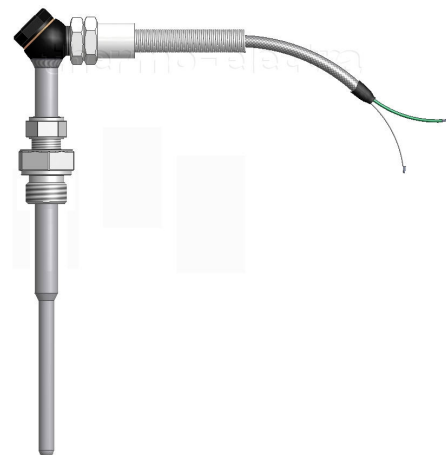

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DWK 6030			
Calibration		↑		
Length "L" in mm			↑	
Length "K" in mm				↑

H6-1 Rev. 07/07