DD 3050S Weld-in thermowell according to DIN43772 Form 4S

Thermowell	
Design	Drilled bar stock (solid machined)
Process connection	Weld-in
Material	
Stock items	Wst. 1.4571, 1.4404, 1.7335, 1.5415, 1.0460
Other materials	To specify
Stem / Shrank	
Wetted part	Tapered
Dimensions	
Length L1, L2, L3.	See table
Standard	According DIN 43772 Form 4S
Bore Size	3.5mm
Tolerance	H7
Options	
	Other dimensions or bore size
	Plug and chain for test wells
	Tagging
	Wake frequency calculation

Type	L1	L2	L3	D1	D2	Connect.
DS1	115	50	40	18	9	M14x1.5
DS2	140	50	65	18	9	M14x1.5

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

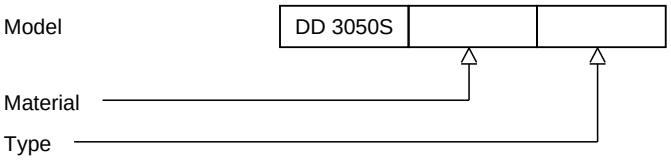

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands
Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com