

# E60 Flexible thermocouple extension cable 1.5 mm²

### Specifications

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Insulation material | Each wire and overall jacket high quality extruded PVC |
| Shape               | Round                                                  |
| Moisture resistance | Good                                                   |
| Flame resistance    | Good                                                   |
| Temperature limits  | -30/+85 °C                                             |

### Conductors

|                     |                                        |
|---------------------|----------------------------------------|
| Conductor type      | Stranded                               |
| Conductor size      | 1.5 mm² ( 48 x 0.2 mm )                |
| Number of pairs     | 1, 2, 4, 6, 8 or 12 pairs              |
| Pair identification | Each wire numbered, for multipair only |

### Calibration

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Thermocouple type | K, T, J, E, U, L, N, B, R or S                        |
| Limits of error   | According IEC 60584-3, 2007 and ANSI MC 96.1          |
| Colourcode        | According thermocouple calibration IEC, ANSI, BS etc. |

### Delivery


|         |                        |
|---------|------------------------|
| On roll | Length up to 200 meter |
| On reel | Length > 200 meter     |

|                  |     |     |      |      |      |      |       |
|------------------|-----|-----|------|------|------|------|-------|
| Number of pairs  | 1   | 2   | 4    | 6    | 8    | 12   | Pair  |
| Outside diameter | 7.0 | 8.5 | 12.0 | 14.1 | 16.0 | 19.5 | mm    |
| Weight           | 100 | 120 | 185  | 305  | 455  | 710  | kg/km |



### Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

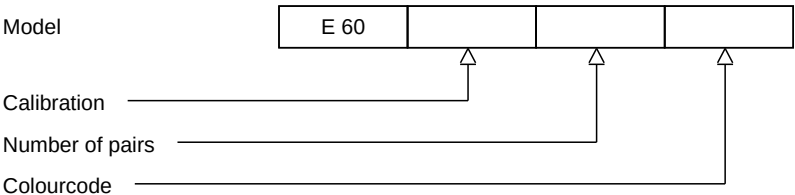

H8-1 Rev. 07/07