

# ME 7096 Bracket mounted surface thermocouple

## Sheath

<b>Construction</b>	Mineral insulated ( MgO )
<b>Material</b>	Stainless steel 316 standard, other materials possible
<b>Diameter</b>	6.0mm standard, other diameters possible

## Connection head

<b>Model</b>	1088
<b>Material</b>	Stainless steel 316
<b>Cable entry</b>	M20x1.5, without cable gland

## Thermo-element

<b>Calibration</b>	K, T, J or N
<b>Duplex</b>	KK, TT, JJ or NN
<b>Hot junction</b>	Insulated
<b>Accuracy</b>	According IEC 60584
<b>Material</b>	Stainless steel 316 standard, other materials possible

## Pipe clamp


<b>Mounting</b>	Stainless steel pipe clamp
<b>Tube diameter</b>	2"

## Head extension

<b>Material</b>	Stainless steel
<b>Length</b>	To specify


## Options

<b>Certification</b>	ATEX or IECEx explosion proof certified Exe, Exi or Exd
<b>Transmitter 4-20mA</b>	In-Head transmitter, standard or Ex version. Please select from our standard range, see transmitterchapter, specify make, model and range.

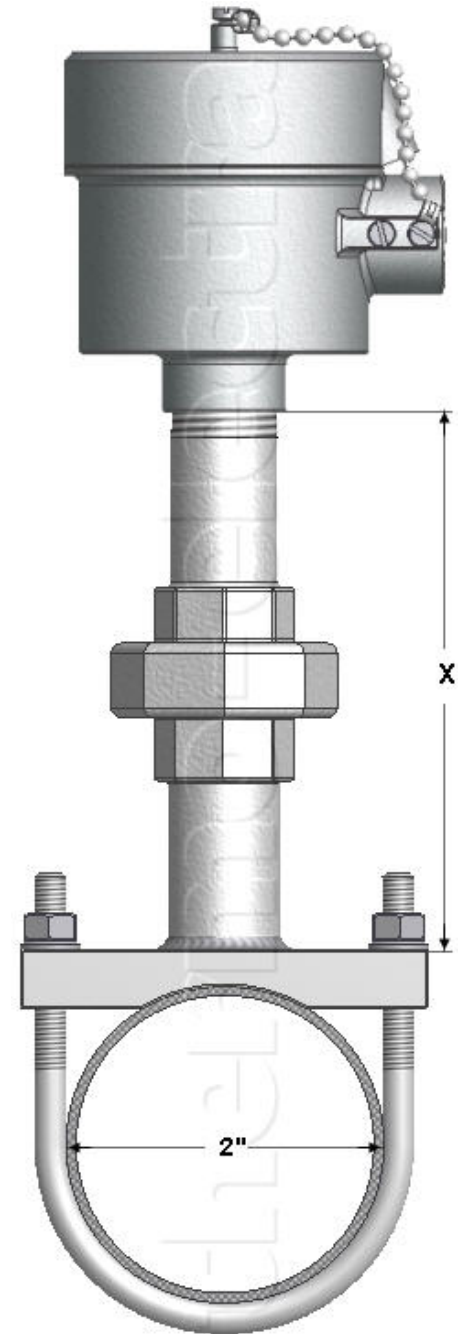

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

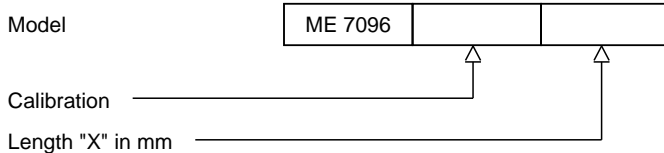

H7-1 Rev. 07/07