



TE1530 Mini panel jack with bracket

Application	
Female panel connector	Thermocouple and RTD circuits
Contacts	Springloaded thermocouple contacts
Materials	Glass filled thermoplastic body with original thermocouple material contacts
Temperature rating	
Temperature limit	Maximum 200°C
Construction	
Body	Glass filled thermoplastic material
Design	Self gripping stainless steel clip
Molded barriers	Prevent short circuit
Wire size	
Accepts wires	From 0,002mm to 0,6mm.
Style / Connection	Easy wire connection through sandwich construction



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

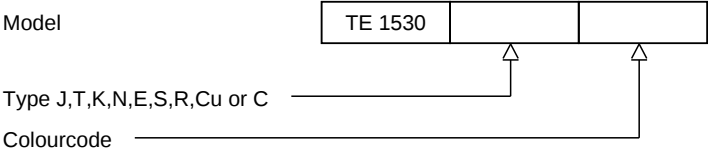

H9-2Rev.0 7/07