

WF 5895 Washer type Pt100 surface probe

Construction

Dimensions	12x6.0mm standard, other dimensions possible
Material	Stainless steel 316 standard, other materials possible
Hole diameter	5.0mm standard, other diameters possible
Ingress protection	IP54

Lead wire

Construction	FEP/PFA insulated flexible cable with internal braiding, 240°C (T) Silicone insulated highly flexible cable, 240°C (S)
Leadwire length	4000mm standard, other lengths possible

Sensor

Type	Single or Duplex Pt100
Style / Connection	3-wire system standard, 4-wire system optional
Accuracy	According IEC 60751 class B
Temperature range	-20/+240°C standard, -200/+600°C optional


Options

Ex versions ATEX or IECEx	Exe, Exi, or Exd
----------------------------------	------------------



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

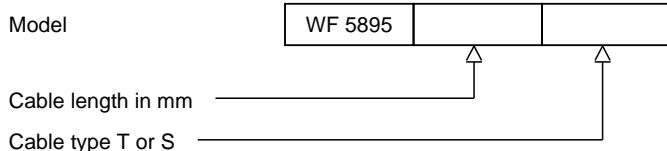

H2-1 Rev.0 7/07