

TE1238 Mini strip panel with mounting frame

Application

Contacts	Springloaded thermocouple contacts
Material	Glass filled thermocouple body with original thermocouple material contacts
No. of circuits per row	2 to maximum 16 circuits
Rows	Maximum 10 vertical rows

Temperature rating


Temperature limit	Maximum 200°C
--------------------------	---------------

Construction

Body	Glass filled thermoplastic material
Design	Stainless steel bracket mounted with 2 screws
Molded barriers	Prevent short circuit
Identified	Scratchproof numbering


Colour code

Frame	Thickness 2.4mm black painted
Connectors	Colour according to thermocouple calibration

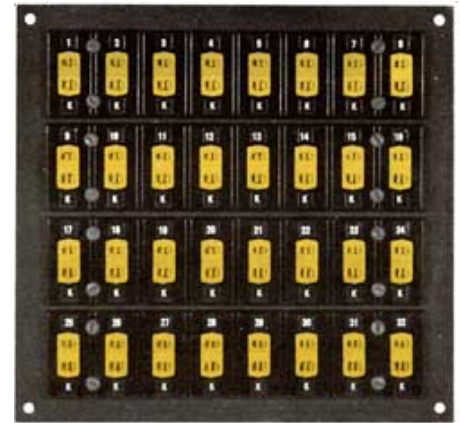

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

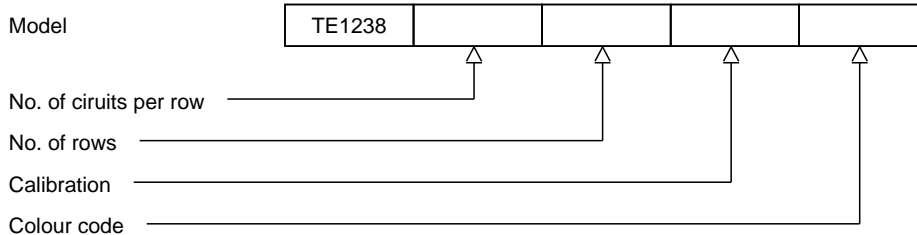

H9-2 Rev. 0 07/07