


CA 1006 Industrial thermocouple flanged to ANSI or DIN 43772 2F, 3F

Protection tube	
Construction	Closed-end tube
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insert diameter	9.0mm standard, other diameters possible
Insertion length	Customer to specify
Process connection	Welded flange, size to be specified
Extension length	Customer to specify
Connection head	
Material	Aluminium, plastic or stainless steel
Cable entry	M20x1.5 cable gland standard, other threads possible
Measuring insert	
Type	MI 1025 Replaceable springloaded dia 6 mm
Length	$E = L + X + 35 \text{ mm}$
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Thermocouple	
Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 60584
Options	
Transmitter 4-20mA	In-Head transmitter, standard or Ex version. Please select from our standard range or specify your own standard
Swing-Cover head	DAN, transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H, transmitter in cover, insert with ceramic block

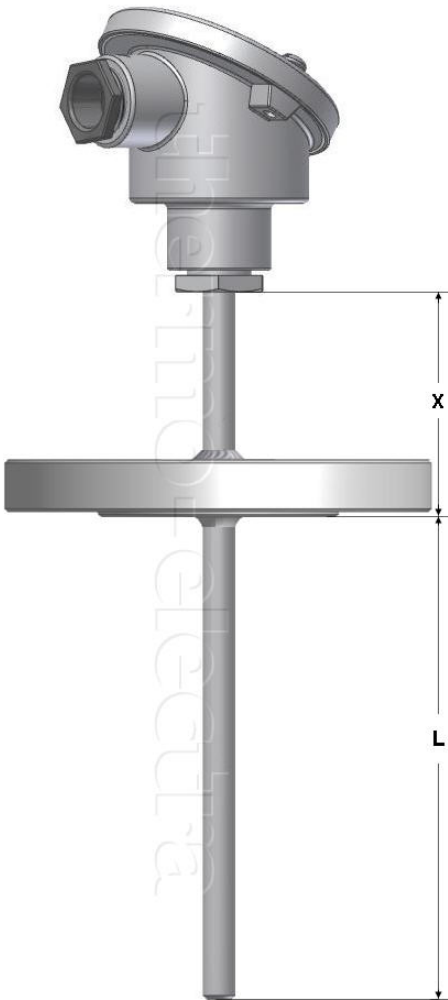

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	CA 1006				
Calibration					
Insertion length "L" in mm					
Extension length "X" in mm					
Flange size/rating					

H1-1 Rev.0 7/07