

ME 7096 Surface resistance thermometer for 2" pipe

Sheath

Construction	Mineral insulated (MgO)
Material	SS316 standard
Diameter	6.0 mm standard

Connection head

Model	1088
Material	SS316
Cable entry	M20 x 1.5

Measuring insert


Type	MI 2025
Construction	Replaceable

Sensor

Sensor type	Single Pt 100: "S" Duplex Pt 100: "D"
Accuracy	According IEC 751 class B
Style / Connection	3 wire system (Optional 4 wire system)
Range	-220 / +600°C


Options

Transmitter	4-20mA In-Head Transmitter, standard or ATEX Explosion proof. Please select from our standard range, see "transmitter" chapter, specify make, model and range
Swing-Cover head	DAN. Transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H. Transmitter in cover. Insert with ceramic block

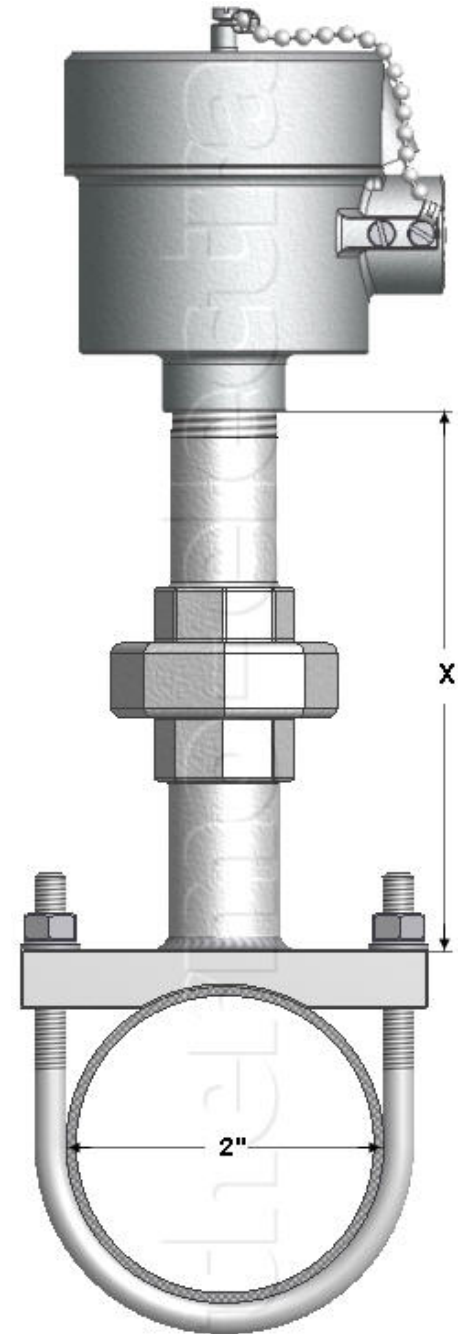

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

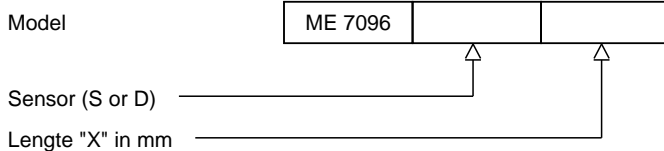

H2-1 Rev.0 7/07