


# TE1134 Standard stripanel 3-pole

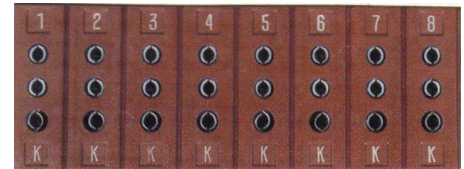

## Application

- Contacts** Springloaded contacts 3-poles, one ground  
**Third contact** Copper contact for drain/ground

## Number of circuits

- Circuits** Available 2 to 12 circuits

## Temperature rating

- Temperature limit** Maximum 205°C ( 260°C intermittent )  
**High temperature version** Maximum 425°C ( 540°C intermittent ), add leter H

## Construction


- Body** Glass filled thermoplastic material  
**Design** Solid single piece, T-nut panel fastening from the front  
**Identified** Scratchproof numbering

## Dimensions

- Height** 57,2mm  
**Width** 19mm x number of circuits

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

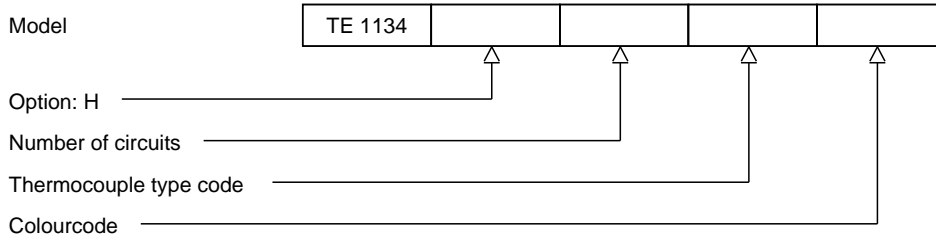

H9-2 Rev. 0 07/07